




NILES®



WS110R

INFRARED EXTENDER SYSTEMS



Wall-mount IR Sensor

- LCD and Plasma proof sensor
- Increased range and Operating Angle
- Individually boxed
- Includes Decora® snap-in color insert; faceplate included

SPECIFICATIONS SHEET

SPECIFICATIONS

Wall-Mount IR Sensor

WS110R

Color	Stock Number
White	FG01414
Bone	FG01415
Almond	FG01416
Black	FG01417



Features

- No installation limitations
- LCD and Plasma proof sensor
- Operates in areas where fluorescent lighting and indirect sunlight are present
- Removable screwless connector for easy installation
- Bi-color LED indicates when remotely located A/V system is on
- Bi-color LED confirms the reception of IR commands
- Sensor pick-up range: >20 feet (depending upon the strength of the handheld remote)
- Removable Decora® snap-in color insert for quick and easy color changes


Specifications

- Dimensions: 2-3/4" wide x 4-1/2" high x 1-1/4" deep
(7cm wide x 11.4cm high x 3cm deep)
- Requires 1-gang electrical box at least 1-1/2" (38.1mm) deep

Warranty: Two-year limited

Shipping weight: 2 lbs.

ACCESSORIES

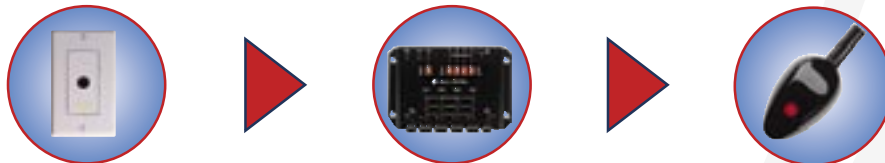

The **WS110R** wall-mount IR sensor is one of three elements needed to form a complete remote control extender system. Elements of a remote control extender system:

- ① **Infrared Sensor/Keypad** receives/initiates the commands and routes them to the Infrared Main System Unit.
- ② **Infrared Main System Unit** amplifies and distributes the commands to the Infrared Flashers.
- ③ **Infrared Flashers** transmit the commands to the A/V components